



Notes:

1. Install 10 foot lengths of 4" perforated PVC pipe out of the bottom of catch basins at a 1.00% grade. The upstream end shall be plugged. The underdrain shall be protected from construction traffic after installation.
2. Subgrade drains are to be installed at all catch basins.

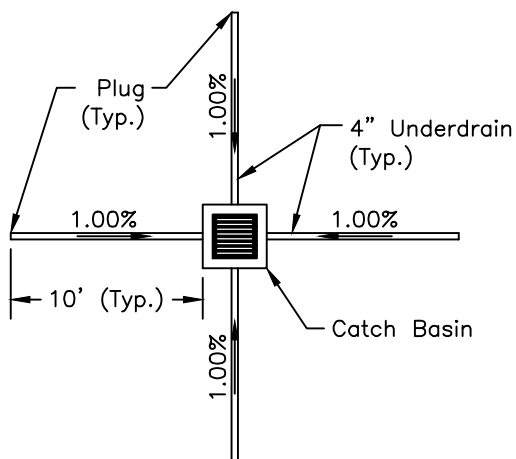

TYPICAL UNDERDRAIN LAYOUT

SCALE: 1" = 10'

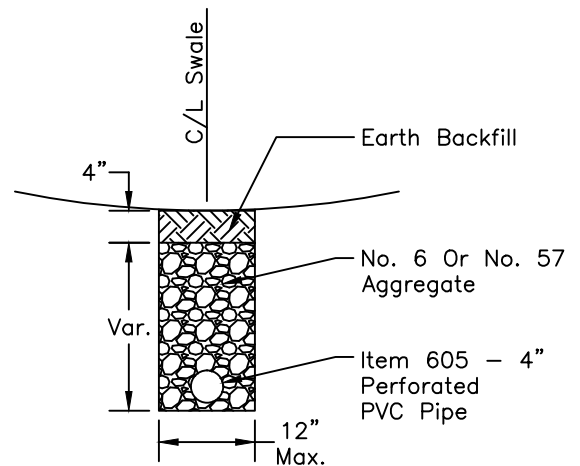

TYPICAL UNDERDRAIN DETAILS

SCALE: 1" = 2'

APPROVED

CITY ENGINEER DATE

SCALE: As Shown

FINGER DRAIN DETAIL

CITY OF
HILLIARD, OHIO

STANDARD
CONSTRUCTION DRAWING

1/1

FD-1